



- **600 Denier Polyester With Urethane Coating**
- **Water Repellent**
- **Mildew Resistant**
- **Building Code Compliant C 403.2.10.1 & R 403.4.1**
- **Meets California Building Energy Standards**

Super Fast HVAC Foam Protection

With the introduction of new building code regulations regarding protection of foam insulation on HVAC line sets, Techflex® has developed a new lightweight wrap to assist installers with code compliance. Our new Dura HVAC Wrap is constructed of a tightly woven breathable polyester shell that offers protection from wind, rain, mildew, UV rays and abrasion. The extra wide hook and loop closure assists in covering multiple diameters quickly and easily for a tight fit.




Protect your HVAC foam insulation from harmful UV rays with Dura HVAC Wrap.



BUILDING CODE COMPLIANT C403.2.10.1 & R403.4.1

Piping insulation exposed to the weather shall be protected from damage, including that due to sunlight, moisture, equipment maintenance and wind, and shall provide shielding from solar radiation that can cause degradation of the material. Adhesive tape shall not be permitted.

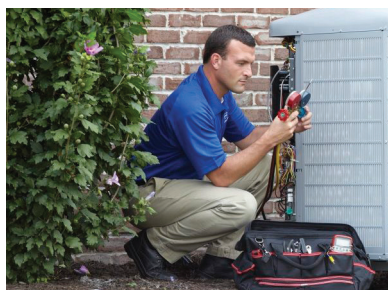

Nominal Size	Part #	Wall Thickness	Hook & Loop	Standard Spool Put-Ups		Available Colors	Lbs/ 100'
				Bulk Spool	Shop Spool		
1 1/2"	FPW1.50BK	.013"	1 1/2"	150'	25'	Black (BK)	4.71
2"	FPW2.00BK	.013"	1 1/2"	150'	25'	Black (BK)	5.34
2 1/2"	FPW2.50BK	.013"	1 1/2"	150'	25'	Black (BK)	5.89
3"	FPW3.00BK	.013"	1 1/2"	150'	25'	Black (BK)	6.66
3 1/2"	FPW3.50BK	.013"	1 1/2"	150'	25'	Black (BK)	7.10
4"	FPW4.00BK	.013"	1 1/2"	150'	25'	Black (BK)	7.84
4 1/2"	FPW4.50BK	.013"	1 1/2"	150'	25'	Black (BK)	8.36